
# Huiderui Lithium


## Thin Cell CF042629

### Specifiation

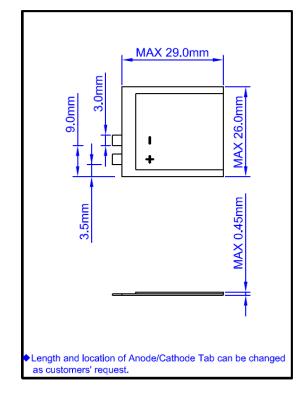

Nominal Voltage		3. 0V
Dimensions (Max.)	Length	29. Omm
	Width	26. Omm
	Thickness	0. 45mm
Ref.Weight		0.5g
Nominal Capacity(Ave.)		14mAh
Continuous Standard Load		0. 35mA
Cut off Voltage		2. 0V
Maximum Continuous Discharge Current		5mA
Maximum Pulse Discharge Current		7mA
Operating Temperature		−20~60°C

### Discharge Characteristics

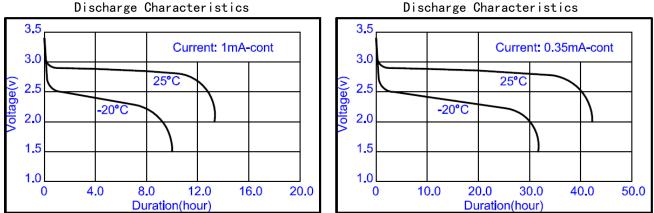

#### WARN ING:

■ Do not charge, disassemble, heat above 100°C or incinerate.

■ Do not mix fresh batteries and used batteries or other types of battery together.

■ Do not short circuit.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.