



Huiderui Lithium

Cell Type CR17450E-R Specification

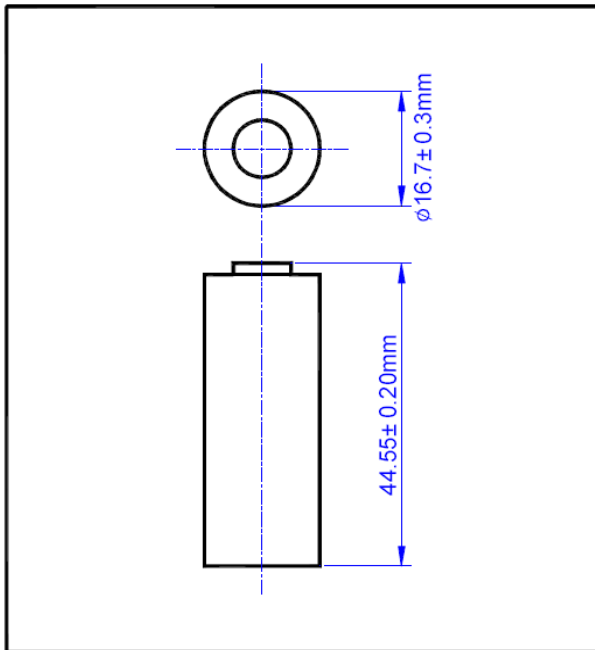


Nominal Voltage		3.0V
Dimensions (Max.)	Diameter	17.0mm
	Height	45.0mm
Ref. Weight		24.0g
Nominal Capacity (Ave.)		2700mAh
Continuous Standard Load		0.5mA
Cut off Voltage		2.0V
Maximum Continuous Discharge Current		1000mA
Maximum Pulse Discharge Current		2500mA
Operating Temperature		-40~85°C


Discharge Characteristics

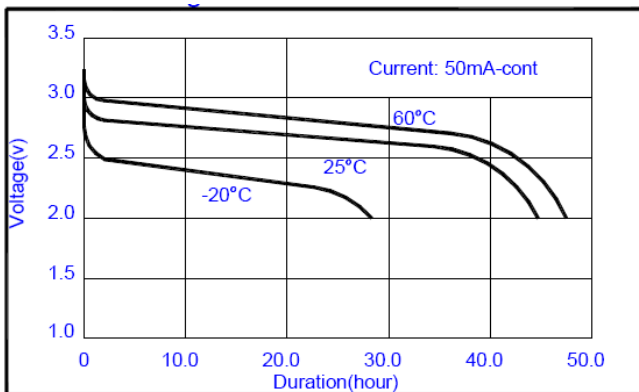


Discharge Characteristics

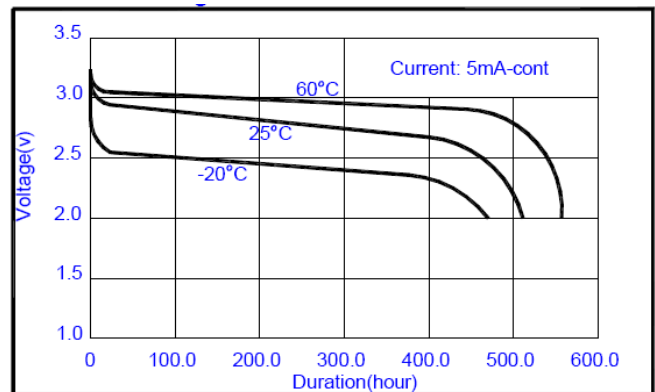

Discharge Load vs Voltage

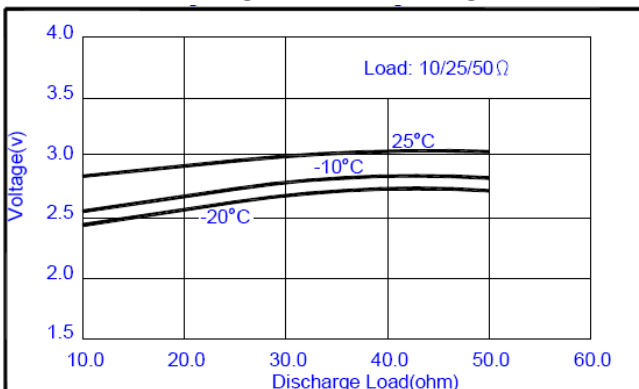

Discharge Characteristics

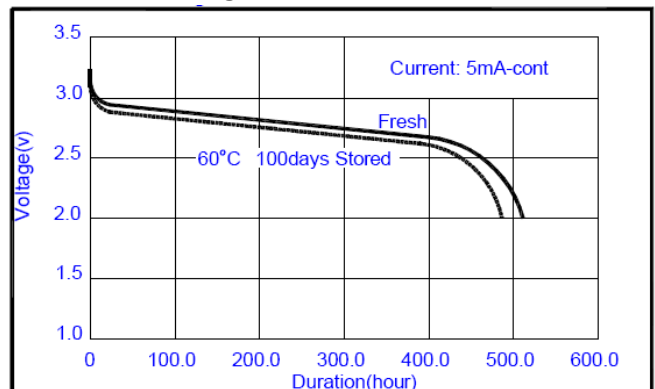

WARNING:

- Do not charge, disassemble, heat above 100°C or incinerate.
- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.