



Nominal Voltage		3.0V
Dimensions (Max.)	Diameter	14.5mm
	Height	50.5mm
Ref. Weight		20.5g
Nominal Capacity (Ave.)		2000mAh
Continuous Standard Load		0.5mA
Cut off Voltage		2.0V
Maximum Continuous Discharge Current		1000mA
Maximum Pulse Discharge Current		2500mA
Operating Temperature		-40~85°C

Discharge Characteristics


Discharge Characteristics

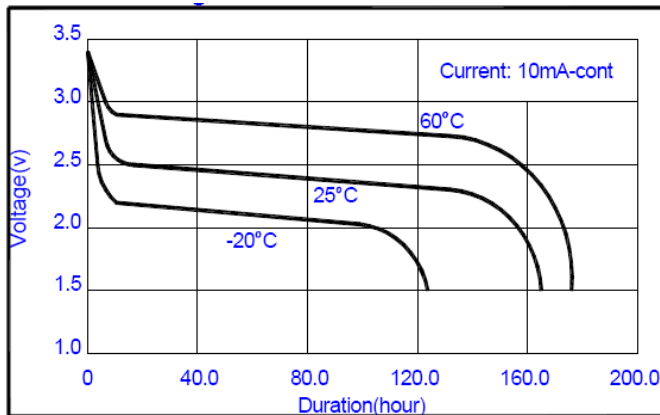


Discharge Load vs Voltage

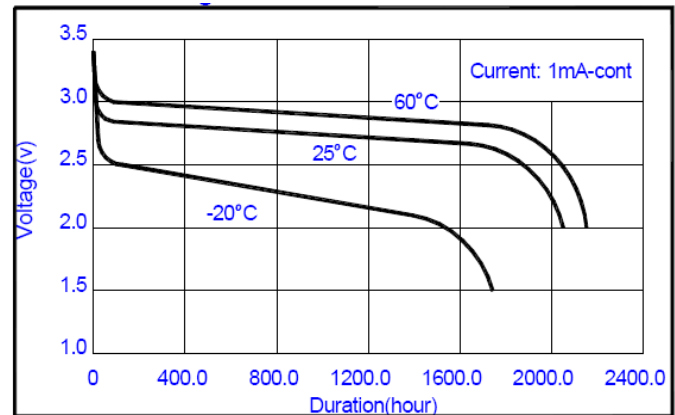

Discharge Characteristics

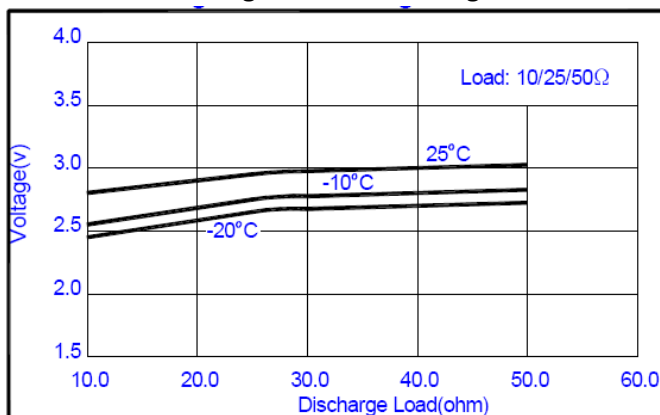

Discharge Load vs Voltage

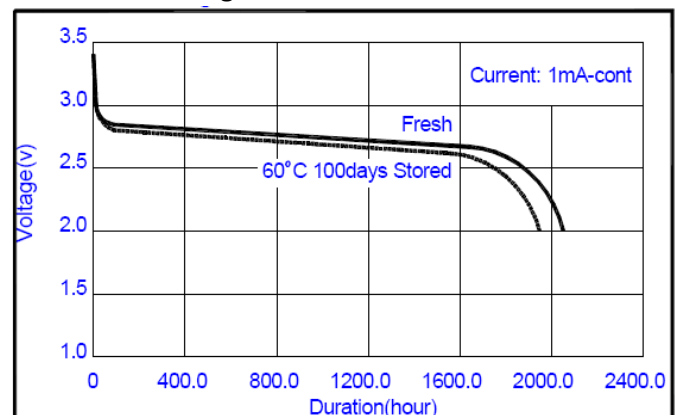

Discharge Characteristics

WARNING:

- Do not charge, disassemble, heat above 100°C or incinerate.
- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.