


FR10445 / FR03 / AAA Cylindrical Primary Lithium



Chemical system		Lithium/Iron Disulfide
Nominal voltage		1.5 V
Dimension	Diameter	10.2(Typical)/10.4(Max)
	Over all Height	44.3(Typical)/44.5 (Max)
Cell weight		7.1g
Nominal discharge current		20 mA
End voltage of discharge		0.8 V
Nominal Capacity		1150mAh(Ave.)
Operating temperature		-40°C ~ 60°C
Storage temperature		-10°C ~ 35°C
Storage life		10years@21°C

Typical discharge curve

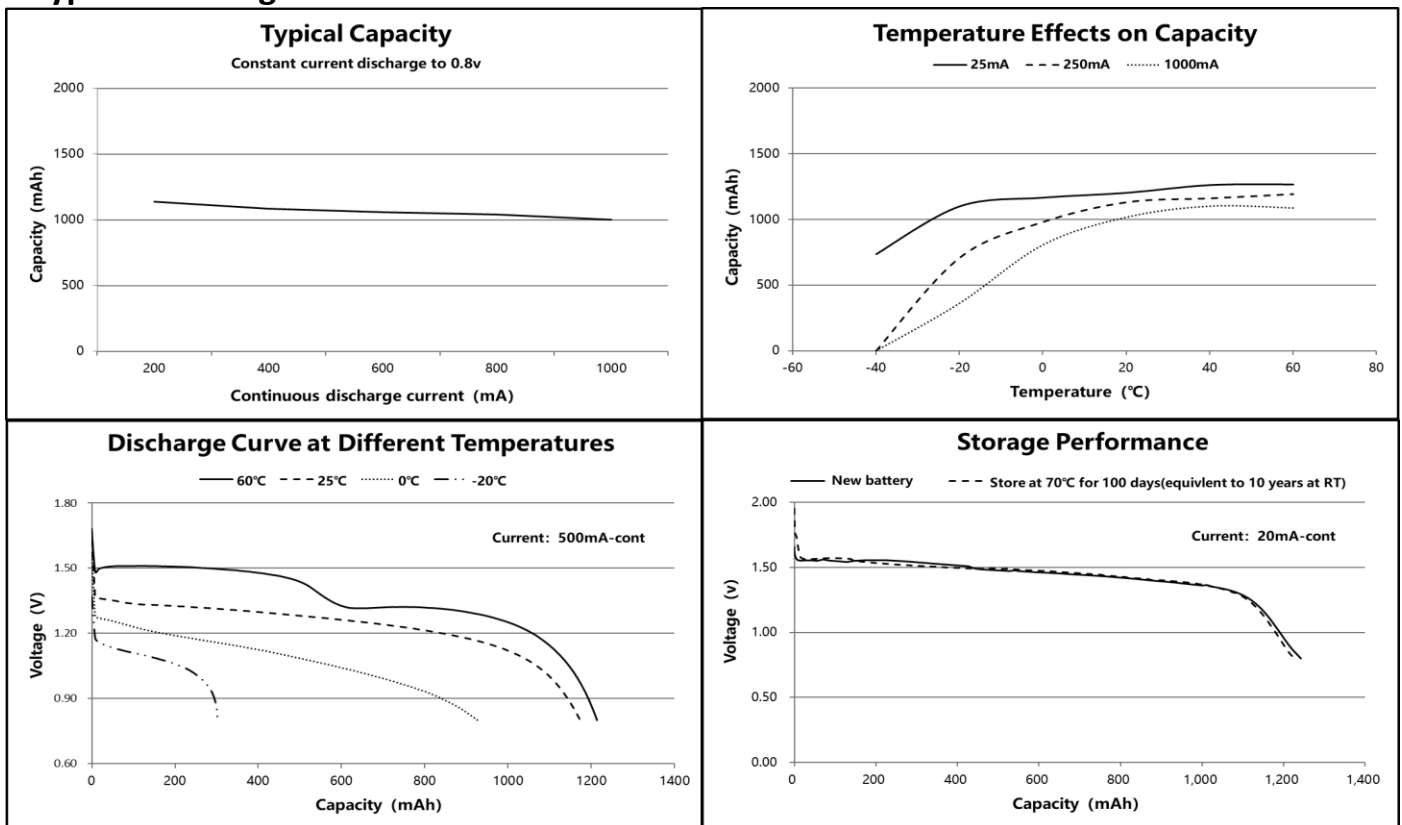

*Please consult Huiderui for use below and above -20°C to +60°C.

Warning:

- Keep away from Children. If swallowed, promptly see doctor.
- Risk of fire, explosion, burning. Do not open battery, dispose of in fire, heat over 100°C (212°F). If expose damaged battery to water, recharge, put in backwards, mixed with used or other battery types-May explode or leak and cause personal injury.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice.

Contact Huiderui for the latest information.