
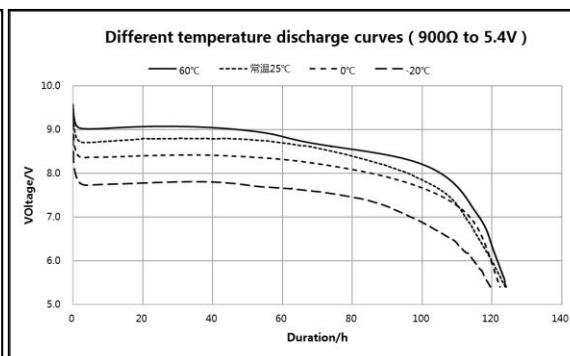


L	24.5-26.3 mm
W	16.5-17.0 mm
H	46.5-48.5 mm
S	45.6 mm (max)
D	12.4-12.95 mm

Chemical system		Li—Manganese dioxide/Organic
Nominal voltage		9.0 V
Dimension Max	Length (L)	26.3 mm
	Width (W)	17.0 mm
	Height (H)	48.5 mm
Cell weight		Approx.41.0g
Nominal Capacity		1200mAh
Nominal discharge current		1 mA
End voltage of discharge		5.4 V
Max. continuous discharge current		600 mA
Max. pulse discharge current		1000 mA
Operating temperature		-20°C ~ 60°C

Typical discharge curve

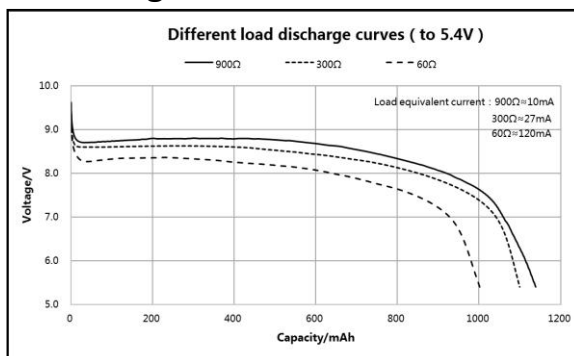

Typical applications data

Application	Test mode	Performance
Radio / Clock	620Ω 2hr/day	81h
Smoke detector	620Ω 1s/hr+10000Ω 3599s/hr	50d
Toy	270Ω 1hr/day	36h
Radio communications equipment	510Ω 4hr/day	65h

Warning:

- Keep away from Children. If swallowed, promptly see doctor.
- Risk of fire, explosion, burning. Do not open battery, dispose of in fire, heat over 100°C (212°F). If expose damaged battery to water, recharge, put in backwards, mixed with used or other battery types-May explode or leak and cause personal injury.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.